

Produktdatenblatt

Spezifikationen



Smart-UPS, Line Interactive,
750VA, Lithium-ion, Rack/Tower,
2HE, 230V, 6 IEC 13-Ausgänge,
SmartConnect-Port+SmartSlot,
kurze Tiefe, AVR, LCD

SMTL750RMI2UC

EAN Code: 0731304407966

Übersicht

Ausführung	Nicht zur Verwendung durch Verbraucher bestimmt. Intelligenter und effizienter Stromversorgungsschutz im Netzwerk mit skalierbarer Laufzeit. Ideal für Server, POS-Systeme, medizinische und Netzwerkgeräte.
------------	--

Hauptmerkmale

Main input voltage	230 V AC 1 Phase
Other input voltage	220 V 240 V
Input connection	IEC 60320 C14
Input protection	Circuit breaker
Efficiency at full load	151 - 302 V einstellbar 160 - 286 V
Input frequency	50/60 Hz +/-3 Hz automatische Erfassung
Output voltage	230 V AC 1 Phase
Other output voltage	220 V 240 V
Rated power in W	600 W
Rated power in VA	750 VA
Output connection	6 IEC 60320 C13 2 IEC-Steckbrücken
Crest factor	3:1
Harmonic distortion	Weniger als 5 %
Maximum configurable power in VA	750 VA
Maximum configurable power in W	600 W
Transfer time	6 ms typisch, 10 ms max.
UPS topology	Line-Interactive
Waveform type	Sinuswelle
Output frequency	50/60 Hz +/-3 Hz Netzsynchronisation

Graphen

Laufzeit	View Runtime Graph
Effizienz	View Efficiency Graph

Bruttopreisliste für Deutschland zuzüglich Zuschläge, Frachtkosten und Mehrwertsteuer, gültig ab dem 1. Januar 2024. Irrtum und Änderungen vorbehalten. Es gelten die AGBs der Schneider Electric GmbH.

Haftungsausschluss: Diese Dokumentation dient nicht als Ersatz für die Beurteilung der Eignung oder Verlässlichkeit dieser Produkte für bestimmte Verwendungsbereiche des Benutzers und darf nicht zu diesem Zweck verwendet werden.

Zusatzmerkmale

Battery type	Li-Ion (Lithium-Ionen) internal included
Control panel	Multifunktionale LCD-Status- und Steuerungskonsole
Free slot	1
Alarm	Alarm bei Batteriebetrieb : Dezidiert Alarm bei niedriger Batterieladung
UPS connectivity	Serieller Anschluss USB-Anschluss SmartConnect-Anschluss Freier Erweiterungssteckplatz
Communication port support	SmartConnect-Ethernet-Anschluss: für die Cloud-Überwachung Die Verfügbarkeit der Funktionen hängt von den Nutzungsbedingungen ab.
Software package	SmartConnect Software für die Fernüberwachung der Stromversorgung Die Verfügbarkeit der Funktionen hängt von den Nutzungsbedingungen ab.
Surge energy rating	645 J
Noise filtering	Mehrpolige Geräuschfilterung, 0,3 % IEEE-Überspannschutz, Null-Klemm-Reaktionszeit: Gemäß UL1449
Number of rack unit	2U
Color	Schwarz mit silbernem Frontgitter
Height	86 mm
Width	438 mm
Depth	318 mm
Product weight	15,4 kg
Mounting preference	Niedriger
Mounting mode	Für den Einbau in ein Rack
USB compatible	Yes
Mounting mode	Für den Einbau in ein Rack with included kit
Provided equipment	USB-Kabel Ethernet patch cable Rack-Montage-Halterungen Schraube Unterlegscheibe Rack-Montage-Tragschienen
Additional specification	Cloud-enabled monitoring
Redundant	No
Range of product	Smart-UPS
Product or component type	Unterbrechungsfreie Stromversorgung

Montage

Product certification	C-Tick CE EAC UK PSTI
Standard	EN/IEC 62040-2:2006/AC:2006 EN/IEC 62040-2:2018
Ambient air temperature for operation	0...40 °C
Ambient air temperature for storage	-15...45 °C
Storage altitude	0...7620 m
IP protection	IP20

Relative humidity	0...95 % nicht kondensierend
Storage relative humidity	0...95 % nicht kondensierend
Acoustic level	41 dBA
Heat dissipation	135 Btu/h
Operating altitude	0 - 10.000 ft

Batterien und Überbrückungszeit

Battery type	Li-Ion (Lithium-Ionen)
Battery graph comment	Dieses Diagramm basiert auf gemessenen Autonomiezeitangaben. Alle Messungen wurden mit neuen, vollständig geladenen Batterien bei ohmscher Ausgangslast (LF = 1,0) durchgeführt. Die tatsächliche Autonomiezeit kann von den Werten in diesem Diagramm abweichen. Die tatsächliche Autonomiezeit ist abhängig von verschiedenen Variablen wie Alter der Batterie, Batterieladezustand, Umgebungsbedingungen und Eigenschaften der angeschlossenen Last
Extendable runtime	0
Typical recharge time	3 h
Battery design life	8...10 Jahre
Battery charging power	50 W bewertet

Verpackungseinheiten

VPE 1 Art	PCE
Anzahl der Geräte pro Packung	1
VPE 1 Höhe	22,9 cm
VPE 1 Breite	47,2 cm
VPE 1 Länge	58,4 cm
Verpackungsgewicht (Lbs)	18,6 kg

Vertragliche Gewährleistung

Garantie (in Monaten)	60
-----------------------	----



Environmental Data

Schneider Electric hat sich zum Ziel gesetzt, den Net Zero-Status bis 2050 durch Lieferkettenpartnerschaften, Materialien mit geringerer Auswirkung und Kreislaufbildung über unsere laufende Kampagne "Use Better, Use Longer, Use Again" zu erreichen, um die Lebensdauer und Recyclingfähigkeit der Produkte zu verlängern.

[Erläuterung der Environmental Data](#) >

[Wie wir die Produktnachhaltigkeit bewerten](#) >



Umweltbilanz

Total lifecycle Carbon footprint	433 kg CO2 eq.
CO ₂ -Fußabdruck der Herstellungsphase [A1 bis A3]	218 kg CO2 eq.
CO ₂ -Fußabdruck der Distributionsphase [A4]	2 kg CO2 eq.
CO ₂ -Fußabdruck der Installationsphase [A5]	1 kg CO2 eq.
CO ₂ -Fußabdruck der Nutzungsphase [B2, B3, B4, B6]	199 kg CO2 eq.
CO ₂ -Fußabdruck der End-of-Life-Phase [C1 bis C4]	12 kg CO2 eq.
Umweltproduktdeklaration	Produktumweltprofil

Use Better



Materialien und Verpackung

Durchschnittlicher Prozentsatz des recycelten Kunststoffgehaltes	15 %
Verpackung mit Recycling-Karton	Ja
Verpackung ohne Kunststoff	Nein
SCIP-Nummer	8519b6fb-f7a9-44f8-be44-5dee68362126
EU-RoHS-Richtlinie	Freistellungskonform
REACH-Verordnung	Produkt beinhaltet besorgniserregende Stoffe (SVHC) über dem Schwellwert



Energieeffizienz

CO2 Fußabdruck am Ende der Betriebsdauer	Energieeffizientes Produkt
--	----------------------------

Use Again




Reproduktion

Recyclingfähigkeitspotential in %	51
Circular Economy-Eignung	Entsorgungsinformationen
Austauschbare Batterie	Vom Benutzer austauschbar
Rücknahme	Ja
WEEE-Kennzeichnung	 Das Produkt muss entsprechend bestimmter Hinweise auf Märkten der Europäischen Union entsorgt werden und darf nicht in Haushaltsabfälle gelangen.

Image of product / Alternate images


Alternative

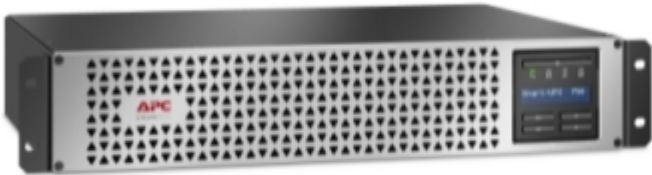

Product Environmental Profile

APC Smart-UPS Li-Ion, Short Depth Uninterruptible Power Supply

500 to 1500 VA rack-mounted UPS with Li-ion batteries






General information

Representative product	APC Smart-UPS Li-Ion, Short Depth 1500VA, 120V with SmartConnector - SMTL1500RM3UC
Description of the product	APC Smart-UPS™ with lithium-ion batteries protects critical data and equipment from power problems by supplying clean and reliable network-grade power. Patented green mode provides high efficiency at all load levels and lithium-ion batteries provide 2X in battery life, better performance at higher temperatures and Total Cost of Ownership savings compared to valve-regulated lead-acid (VRLA) batteries.
Description of the range	500 to 1500 VA rack-mounted UPS with Li-ion batteries The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
Products covered	SMTL1000RM2UC SMTL1000RM2UCQ SMTL1000RMI2U SMTL1000RMI2UC SMTL1000RMI2UNC SMTL1500RM3UCQ SMTL1500RMI3U SMTL1500RMI3UC SMTL1500RMI3UNC SMTL1K5R3CX180 SMTL750RM2UC SMTL750RM2UCQ SMTL750RMI2U SMTL750RMI2UC SMTL750RMI2UNC SCL500RM1NC SCL500RM1UC SCL500RM1UNC SCL500RMI1U SCL500RMI1UC SCL500RMI1UNC
Functional unit	To protect the load of 1350 Watts against input power failure during 5 years and provide a backup time of 5 minutes in case of a power outage.



Constituent materials

Reference product mass	22680 g including the product, its packaging and additional elements and accessories
------------------------	--

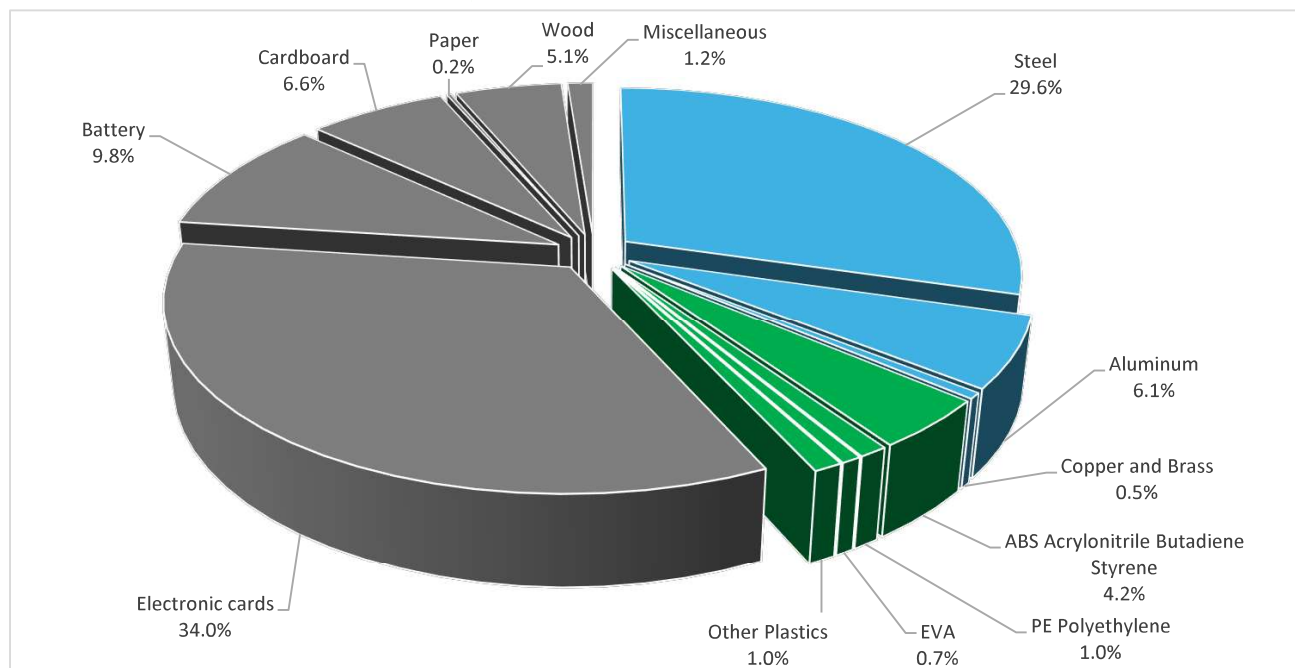

Plastics	6.9%
Metals	36.1%
Others	56.8%



Substance assessment

Products of this range are designed in conformity with the requirements of the RoHS directive", (European Directive 2011/65/EU of 8 June 2011 and EU Directive 2015/863) and do not contain, or only contain in the authorised proportions", lead, mercury, cadmium, hexavalent chromium, flame retardants (polybrominated biphenyls", - PBB, polybrominated diphenyl ethers - PBDE) or phthalates (Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP), Diisobutyl phthalate (DIBP)) as mentioned in the Directives.

The battery pack(s) within this product range are designed to conform with the requirements of the Battery and Accumulator Directive (European Directive 2006/66/EC of 26 September 2006) and do not contain, or only contain in authorized proportions, the regulated substances lead (Pb), mercury (Hg) and cadmium (Cd) as mentioned in the Directive. Additionally, the lithium ion battery pack contained within this product has been tested in accordance with UN38.3 and a UN38.3.5 Test Summary Report is available.


Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>

 Additional environmental information	
The APC Smart-UPS Li-Ion, Short Depth 1500VA, 120V with SmartConnector presents the following relevant environmental aspects	
Design	High-efficiency green mode: Achieves up to 97% percent efficiency, which minimizes utility and cooling costs without compromising performance or reliability.
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 3219.7 g, consisting of cardboard (48%), wood (39%), plastic (12%), paper (1%) Product distribution optimised by setting up local distribution centres
Installation	The SMTL1500RM3UC Smart-UPS Li-Ion does not require any special installation materials or operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Li-Ion batteries (2416g), Printed Circuit Boards>10cm2 (1510g), Electrolytic Capacitors (54g), BFR plastics (62g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End of Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 51% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

 Environmental impacts				
Reference life time	5 years			
Installation elements	Transport and disposal of packaging are accounted for during installation. No special installation components needed.			
Use scenario	Power consumption conforms to PSR0010 where the product operates at 25% load 0% of the time, 50% load 30% of the time, 75% load 40% of the time and 100% load 30% of the time. The average power consumption wattage is 16.5W			
Geographical representativeness	Europe			
Technological representativeness	The means of material production, processing and transport modeled are representative of the technologies used in production.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: EU-27, CN, BR, JP, US, SG	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27	Electricity grid mix; AC; consumption mix, at consumer; < 1kV; EU-27

Compulsory indicators		APC Smart-UPS Li-Ion, Short Depth 1500VA, 120V with SmartConnector - SMTL1500RM3UC					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	2.60E-02	2.60E-02	0*	0*	3.07E-05	0*
Contribution to the soil and water acidification	kg SO ₂ eq	3.08E+00	1.58E+00	1.34E-02	1.19E-03	1.47E+00	1.14E-02
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	4.30E-01	3.33E-01	3.08E-03	5.72E-04	8.90E-02	4.97E-03
Contribution to global warming	kg CO ₂ eq	6.38E+02	2.66E+02	2.93E+00	1.45E+00	3.54E+02	1.46E+01
Contribution to ozone layer depletion	kg CFC11 eq	1.51E-04	1.27E-04	0*	0*	2.30E-05	6.44E-07
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	1.67E-01	8.34E-02	9.53E-04	3.44E-04	8.10E-02	1.05E-03
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	1.30E+03	1.41E+01	0*	0*	1.28E+03	0*
Total Primary Energy	MJ	1.24E+04	5.29E+03	4.14E+01	2.98E+00	7.06E+03	5.42E+01

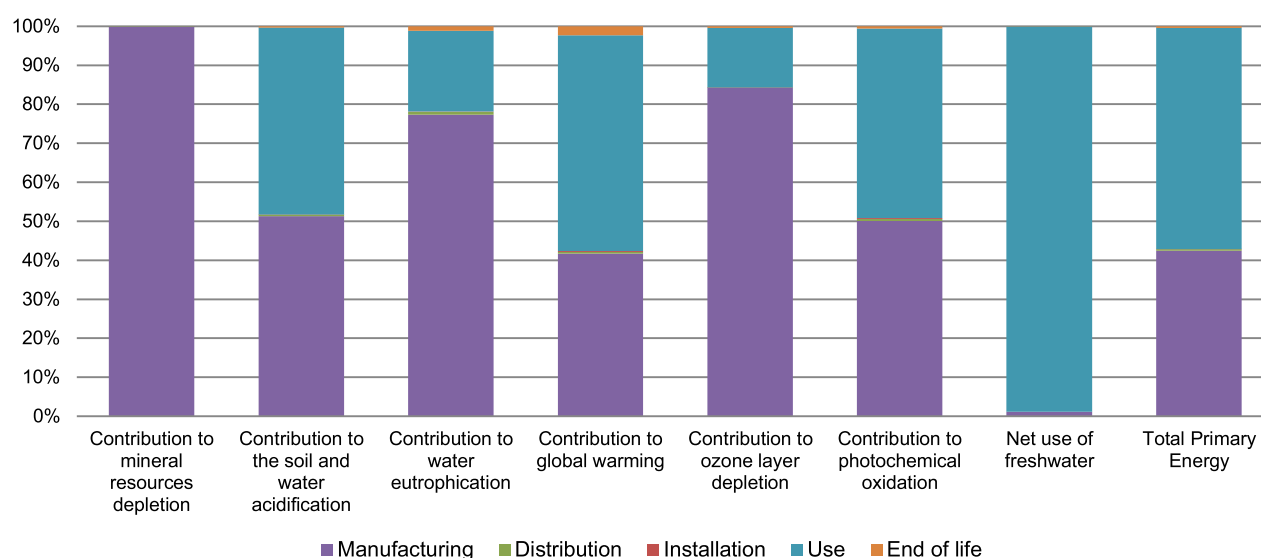

Optional indicators		APC Smart-UPS Li-Ion, Short Depth 1500VA, 120V with SmartConnector - SMTL1500RM3UC					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7.06E+03	2.96E+03	4.11E+01	2.81E+00	4.01E+03	4.24E+01
Contribution to air pollution	m ³	5.19E+04	3.61E+04	1.24E+02	3.89E+01	1.52E+04	4.36E+02
Contribution to water pollution	m ³	5.58E+04	4.00E+04	4.81E+02	3.18E+01	1.46E+04	6.73E+02
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	2.79E+00	2.79E+00	0*	0*	0*	0*
Total use of renewable primary energy resources	MJ	1.01E+03	1.13E+02	0*	0*	8.98E+02	0*
Total use of non-renewable primary energy resources	MJ	1.14E+04	5.17E+03	4.13E+01	2.94E+00	6.16E+03	5.42E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	9.51E+02	5.34E+01	0*	0*	8.98E+02	0*
Use of renewable primary energy resources used as raw material	MJ	5.96E+01	5.96E+01	0*	0*	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1.13E+04	5.03E+03	4.13E+01	2.94E+00	6.16E+03	5.42E+01
Use of non renewable primary energy resources used as raw material	MJ	1.47E+02	1.47E+02	0*	0*	0*	0*
Use of non renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0.00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life

Hazardous waste disposed	kg	1.11E+03	1.07E+03	0*	0*	1.84E-01	4.28E+01
Non hazardous waste disposed	kg	1.50E+03	1.81E+02	0*	1.33E+00	1.32E+03	5.08E-01
Radioactive waste disposed	kg	9.81E-01	9.98E-02	0*	0*	8.80E-01	3.61E-04
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Materials for recycling	kg	1.42E+01	1.25E+00	0*	2.04E+00	0*	1.09E+01
Components for reuse	kg	0.00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	3.65E+00	0*	0*	0*	0*	3.65E+00
Exported Energy	MJ	8.63E-01	8.11E-02	0*	7.82E-01	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.8.1, database version 2018-11 in compliance with ISO14044.

The manufacturing phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

The environmental indicators of other products in this family may be proportionally extrapolated, by life cycle phase, based on the ratio of the amount of a key parameter of the product, over the amount of that key parameter within the reference product. Proportionality rules are based on the following key parameters for impacts by lifecycle phase: Manufacturing phase impacts - mass of the product (excluding packaging). Distribution phase impacts - total mass of product (including packaging). Installation phase impacts - mass of packaging. Use phase impacts - product lifetime energy consumption. End of Life impacts - the product mass (excluding packaging).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Registration number :		Drafting rules	PCR-ed3-EN-2015 04 02
Verifier accreditation N°	VH08	Supplemented by	PSR-0010-ed1.1-EN-2015 10 16
Date of issue	04/2019	Information and reference documents	
		Validity period	6 years
Independent verification of the declaration and data, in compliance with ISO 14025 : 2010			
Internal	X	External	
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)			
PEP are compliant with XP C08-100-1 :2014			
The elements of the present PEP cannot be compared with elements from another program.			
Document in compliance with ISO 14025 : 2010 « Environmental labels and declarations. Type III environmental declarations »			

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
CS 30323
F- 92506 Rueil Malmaison Cedex
RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com www.APC.com

Date: Monday, December 29, 2025

REACH Project

Dear Customer,

Schneider Electric SE and its affiliates (Schneider Electric) have undertaken since 2008 to comply strictly with the Reach regulation N° 1907/2006 for the declaration of Substances of Very High Concern (hereafter referred to as SVHC), authorization (Annex XIV) and restriction (Annex XVII).

As per our commitment under article 33 of the said regulation, you will find attached herebelow information, to the best of our knowledge and as of the date of publication of this information, regarding the presence of SVHC in Schneider Electric products.

This information will evolve over time in function of the improved knowledge resulting from both additional information provided by our suppliers and our own investigations.

Moreover, Schneider Electric has taken into account the judgement of the EU Court of Justice of 10 September 2015 in case [C-106/14](#) in the declarations at part level.

In accordance with its environmental strategy, Schneider Electric and its affiliates have decided to apply REACH regulation on a worldwide basis.

In accordance with the Environment policy of our Company, we continuously work towards products and services which reduce the impact to the environment or on human health when used for their intended purpose and in conditions stated in the documentation provided by Schneider Electric. With this objective, Schneider Electric willingness is to substitute as soon as possible substances of concern with a specific focus on REACH Annex XIV replacement before their sunset date.

At life end, we invite you to follow appropriate waste and recycling procedures. In case the product is inside the legal scope of RoHS, please note that this document is not the CE declaration. To access to the CE declaration, please refer to the [Customer Care Centers](#)

Best Regards,

Vanessa MILER-FELS
VP Environment



Global Safety, Environment & Real Estate Senior Vice President
Schneider Electric Industries SAS

Schneider Electric Industries SAS
Postal address / Adresse postale :
Le Hive
35 rue Joseph Monier - CS 30323
F-92506 Rueil Malmaison Cedex
Phone: +33 (0)4 76 57 60 60
<http://www.schneider-electric.com>

Legal information / Mentions légales :
Société par actions simplifiée au capital de 896,313,776 euros
954 503 439 rcs Nanterre - code APE : 2712Z
Siret : 954 503 439 01719
n°ident. TVA : FR 04 954 503 439
Siège Social ! 35, rue Joseph Monier
F - 92500 Rueil-Malmaison

Unless otherwise stated in the table, the data shown in this spreadsheet are related to the following production Date Code: 53/2025 (Week / Year)

Unless otherwise stated in the table, the data shown in this spreadsheet are related to the following version of the REACH regulation:
December 2025 candidate list



Commercial ref. :	SMTL750RMI2UC
Range :	Smart-UPS
Brand :	APC
Product description :	APC Smart-UPS Lithium Ion, Short Depth 750VA, 230V with SmartConnect
SCIP ID :	8519b6fb-f7a9-44f8-be44-5dee68362126
Production date code :	53/2099 (Week/Year)

In this product, no substance under REACH annex XVII regulation is used in the scope of restriction. This includes for instance asbestos, polycyclic-aromatic hydrocarbons (PAH)...

According to REACH Regulation EC 1907/2006 article 33 duties and the judgment of the EU court of Justice of 10 September 2015 in case C-106/14, the following SVHC are present in this product above 0,1% threshold at part level.

Our products are safe from a chemical exposure perspective, under normal conditions of use. If any specific Safe conditions of use, you will find more details in the table.

For specific End of Life recommendations, please look at Product End of Life instructions according to WEEE document.

Part	SVHC content	CAS number	EC number	Specific Safe conditions of use
This product includes Li-ion battery(ies) that contain(s) the following substance(s) above the threshold at part level.	Lead	7439-92-1	-	None
This product includes metallic part(s) that contain(s) the following substance(s) above the threshold at part level.	Lead	7439-92-1	-	None
In this product, the PCBA includes electronic components that contain the following substance(s) above the threshold at component level.	Lead	7439-92-1	-	None

Date: Monday, December 29, 2025

Object: Schneider Electric RoHS declaration (RoHS: Restriction of Hazardous Substances)

Dear Customer,

Effective July 1st, 2006, the European Directive 2002/95/EC -"Restriction of Hazardous Substances" (RoHS), its recast 2011/65/EU of June 8th, 2011, the Delegated Directive (EU) 2015/863 of March 31st 2015, restricts the use in Europe in certain electrical and/or electronic equipments of lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), polybrominated diphenyl ethers (PBDE) flame retardant, and from July 22nd 2019, Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP), Diisobutyl phthalate (DIBP).

Schneider Electric decided to make RoHS compliance of its products one of its priorities, even if they do not fall in RoHS scope, and most of Schneider Electric products are RoHS compliant. This stance is fully in line with Schneider Electric environmental policy and EN IEC 63000:2018 standard.

The information below provides the current product status according to regulation in force at the date of publication of this present document. Any future changes, either in product design or in the Directive may change the status reported here. In case the product is inside the legal scope of RoHS, please note that this document is not the CE declaration. To access to the CE declaration, please refer to the [Schneider Electric download center](#). In the context of the sustainable development policy of our Company we continuously work towards products and services which reduce the impact on environment or human health when used for their intended purpose and in conditions stated in the documentation provided by Schneider Electric.

In the following declaration, a "Pro-active compliance" wording means that the product is not an EEE or not in the legal scope of the regulation, but is in line with the substances restrictions and corresponding exemptions.

Shall you need any further information or have specific questions (eg. related to phased out products), our [Customer Care Centers](#) will support you. Please Note: You can find more information about Schneider Electric environmental commitment on [Environmental Data Program webpage](#)

Best Regards,

Vanessa MILER-FELS
VP Environment



Global Safety, Environment & Real Estate Senior Vice President
Schneider Electric Industries SAS

Schneider Electric Industries SAS
Postal address / Adresse postale :
Le Hive
35 rue Joseph Monier - CS 30323
F-92506 Rueil Malmaison Cedex
Phone: +33 (0)4 76 57 60 60
<http://www.schneider-electric.com>

Legal information / Mentions légales :
Société par actions simplifiée au capital de 896,313,776 euros
954 503 439 rcs Nanterre - code APE : 2712Z
Siret : 954 503 439 01719
n°ident. TVA : FR 04 954 503 439
Siège Social ! 35, rue Joseph Monier
F - 92500 Rueil-Malmaison

Commercial ref.	Range	Compliance status
Brand	Product description	
SMTL750RMI2UC APC	Smart-UPS APC Smart-UPS Lithium Ion, Short Depth 750VA, 230V with SmartConnect	RoHS (10 substances) : Pro-active compliance with exemptions 6(c), 7(a), 7(c)-I (directive evolution applicable from July 22nd 2021)

Product End of Life Instructions

APC Smart-UPS Li-Ion, Short Depth Uninterruptible Power Supply

500 to 1500 VA rack-mounted UPS with Li-ion batteries






Potential disassembly risks

Caution: Batteries may contain an electrical charge - avoid creating a short across the terminals.
Caution: Cracked or bloated batteries may be hazardous and lead to exposure to dangerous materials.



End of Life Instructions

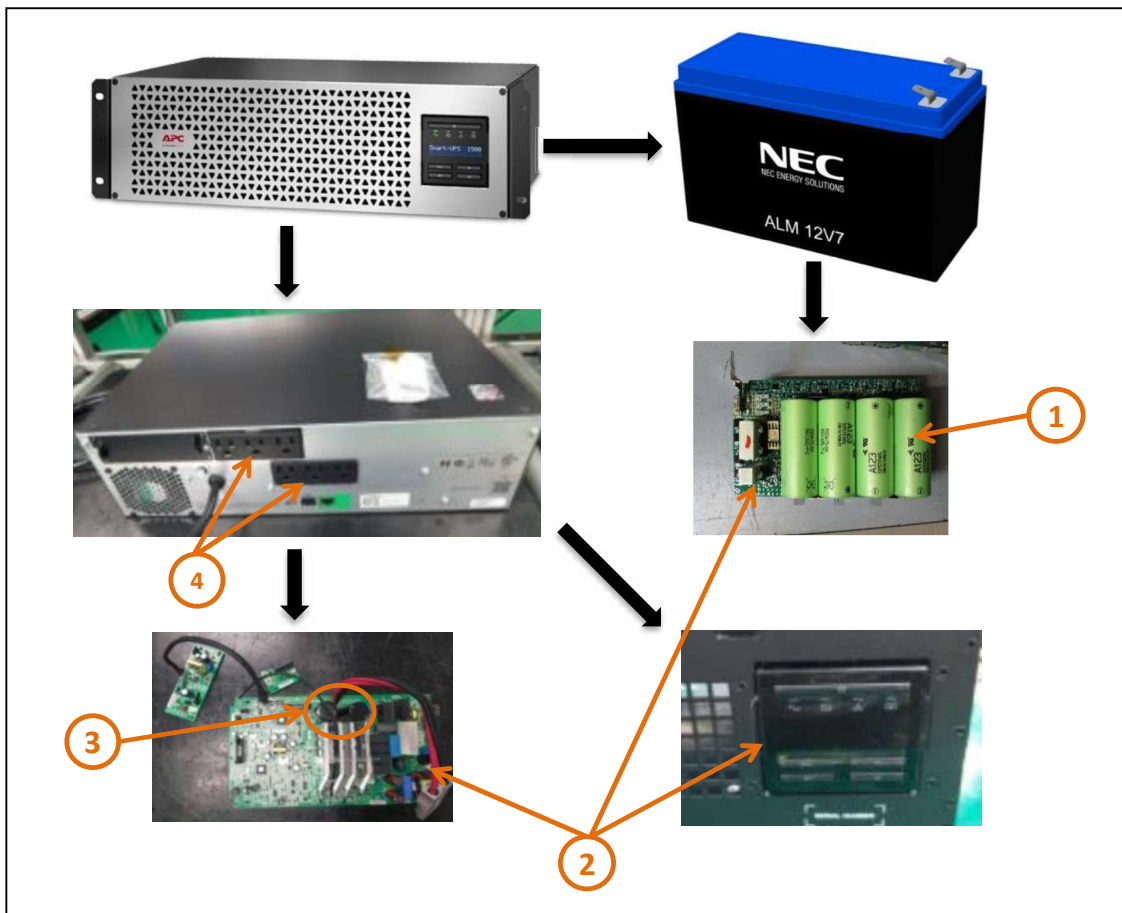

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted	1	Li-ion Batteries	2416	4 x Li-Ion battery emulators See: Safety Data Sheet available at www.apc.com Use authorized battery recycler. Caution: Batteries may contain an electrical charge - avoid creating a short across the terminals. Caution: Cracked or bloated batteries may be hazardous and lead to exposure to dangerous materials.
To be depolluted	2	Electronic Board (Power) > 10cm ²	1510	3 x Printed Circuit Boards
To be depolluted	3	Electrolytic Capacitors	54	2 x Large Electrolytic Capacitors
To be depolluted	4	Brominated Frame Retardant (BFR) Plastic - ABS	62	2 x Plastic parts contained BFR



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	APC
Product function	APC Smart-UPS™ with lithium-ion batteries protects critical data and equipment from power problems by supplying clean and reliable network-grade power. Patented green mode provides high efficiency at all load levels and lithium-ion batteries provide 2X in battery life, better performance at higher temperatures and Total Cost of Ownership savings compared to valve-regulated lead-acid (VRLA) batteries.
Product reference	SMTL1500RM3UC
Additional similar product references	SMTL1000RM2UC SMTL1000RM2UCQ SMTL1000RMI2U SMTL1000RMI2UC SMTL1000RMI2UNC SMTL1500RM3UCQ SMTL1500RMI3U SMTL1500RMI3UC SMTL1500RMI3UNC SMTL1K5R3CX180 SMTL750RM2UC SMTL750RM2UCQ SMTL750RMI2U SMTL750RMI2UC SMTL750RMI2UNC SCL500RM1NC SCL500RM1UC SCL500RM1UNC SCL500RMI1U SCL500RMI1UC SCL500RMI1UNC
Total representative product mass	19500 g
Representative product dimensions	131mm x 438mm x 302mm
Accessories	None
Date of information release	04/2019



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	The battery pack used in this product range contains Li-Ion batteries that are regulated as Dangerous Goods shipping must be performed in accordance with the appropriate transportation regulations.	
Recyclability potential	51%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Country Customer Care Center
<http://www.schneider-electric.com/contact>

35, rue Joseph Monier
 CS 30323
 F- 92506 Rueil Malmaison Cedex
 RCS Nanterre 954 503 439
 Capital social 896 313 776 €

www.schneider-electric.com

www.APC.com

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved