

Produktdatenblatt

Spezifikationen



APC Smart-UPS X, 1500 VA, Rack/Tower LCD, 230 V, mit Netzwerkkarte

SMX1500RMI2UNC

EAN Code: 0731304281702

Übersicht

Ausführung	Nicht zur Verwendung durch Verbraucher bestimmt. Intelligenter und effizienter Stromversorgungsschutz im Netzwerk mit skalierbarer Laufzeit. Ideal für Server, POS-Systeme, medizinische und Netzwerkgeräte.
------------	--

Hauptmerkmale

Main input voltage	230 V AC 1 Phase
Input connection	IEC 60320 C14
Switching current capacity	10 A
Efficiency at full load	151 - 302 V einstellbar 160 - 286 V
Input frequency	50/60 Hz +/-3 Hz automatische Erfassung
Output voltage	230 V AC 1 Phase
Rated power in W	1200 W
Rated power in VA	1500 VA
Output connection	8 IEC 60320 C13 2 IEC-Steckbrücken
Harmonic distortion	Weniger als 5 %
Maximum configurable power in VA	1500 VA
Maximum configurable power in W	1200 W
UPS topology	Line-Interactive
Waveform type	Sinuswelle
Output frequency	50/60 Hz +/-3 Hz Netzsynchrisation
Ersatzbatterien	APCRBC115

Graphen

Laufzeit	View Runtime Graph
Effizienz	View Efficiency Graph

Zusatzmerkmale

Battery type	Blei-Säure internal included
Control panel	Multifunktionale LCD-Status- und Steuerungskonsole
Emergency power off	Ja
Free slot	0

Bruttopreisliste für Deutschland zuzüglich Zuschläge, Frachtkosten und Mehrwertsteuer, gültig ab dem 1. Januar 2024. Irrtum und Änderungen vorbehalten. Es gelten die AGBs der Schneider Electric GmbH.

Haftungsausschluss: Diese Dokumentation dient nicht als Ersatz für die Beurteilung der Eignung oder Verlässlichkeit dieser Produkte für bestimmte Verwendungsbereiche des Benutzers und darf nicht zu diesem Zweck verwendet werden.

Preinstalled device	Network management card 3 with environmental monitoring
Alarm	Alarm bei Batteriebetrieb : Dezidierter Alarm bei niedriger Batterieladung : Überlast-Dauertonalarm
UPS connectivity	Serieller Anschluss USB-Anschluss Vorinstallierte Netzwerkmanagement-Karte 3
Surge energy rating	645 J
Noise filtering	Mehrpolige Geräuschfilterung, 5 % IEEE-Überspannschutz, Null-Klemm-Reaktionszeit: Gemäß UL1449
Number of rack unit	2U
Cable length	1,8 m
Number of cables	1
Color	Schwarz
Height	89 mm
Width	432 mm
Depth	490 mm
Product weight	24,82 kg
Mounting preference	Niedriger
Mounting mode	Für den Einbau in ein Rack
Two post mountable	0
USB compatible	Yes
Mounting mode	Für den Einbau in ein Rack with included kit
Provided equipment	CD mit Software Dokumentations-CD Installationsanleitung Rack-Montage-Tragschienen Abnehmbare Stützfüße Smart UPS Signalisierungskabel RS-232 USB-Kabel
Number of power modules	0
Number of power module filled slots	0
Number of power module free slots	0
Additional specification	Network card pre-installed
Redundant	No
Range of product	Smart-UPS
Product or component type	Unterbrechungsfreie Stromversorgung

Montage

Product certification	C-Tick CE VDE EAC UK PSTI
Standard	EN/IEC 62040-1:2019/A11:2021 EN/IEC 62040-2:2006/AC:2006 EN/IEC 62040-2:2018
Ambient air temperature for operation	0...45 °C
Ambient air temperature for storage	-15...45 °C

Storage altitude	0...15240 m
Relative humidity	0...95 %
Storage relative humidity	0...95 %
Acoustic level	40 dBA
Heat dissipation	133 Btu/h
Operating altitude	0 - 10.000 ft

Batterien und Überbrückungszeit

Battery type	Bleisäurebatterie
Extendable runtime	0
Included battery module	0
Empty battery slot	0
Typical recharge time	3 h
RBC quantity	1
Battery life	3...5 Jahre
Battery charging power	103 W bewertet

Verpackungseinheiten

VPE 1 Art	PCE
Anzahl der Geräte pro Packung	1
VPE 1 Höhe	24,6 cm
VPE 1 Breite	58,9 cm
VPE 1 Länge	62 cm
Verpackungsgewicht (Lbs)	30 kg
VPE 2 Art	PAL
VPE 2 Menge	16
VPE 2 Höhe	135 cm
VPE 2 Breite	100 cm
VPE 2 Länge	120 cm
VPE 2 Gewicht	514,88 kg

Vertragliche Gewährleistung

Garantie (in Monaten)	24 Batterie 36 USV
-----------------------	--------------------



Environmental Data

Schneider Electric hat sich zum Ziel gesetzt, den Net Zero-Status bis 2050 durch Lieferkettenpartnerschaften, Materialien mit geringerer Auswirkung und Kreislaufbildung über unsere laufende Kampagne "Use Better, Use Longer, Use Again" zu erreichen, um die Lebensdauer und Recyclingfähigkeit der Produkte zu verlängern.

[Erläuterung der Environmental Data](#) >

[Wie wir die Produktnachhaltigkeit bewerten](#) >



Umweltbilanz

Total lifecycle Carbon footprint	1 249 kg CO2 eq.
CO ₂ -Fußabdruck der Herstellungsphase [A1 bis A3]	787 kg CO2 eq.
CO ₂ -Fußabdruck der Distributionsphase [A4]	19 kg CO2 eq.
CO ₂ -Fußabdruck der Installationsphase [A5]	5 kg CO2 eq.
CO ₂ -Fußabdruck der Nutzungsphase [B2, B3, B4, B6]	408 kg CO2 eq.
CO ₂ -Fußabdruck der End-of-Life-Phase [C1 bis C4]	29 kg CO2 eq.
Umweltproduktdeklaration	Produktumweltprofil

Use Better



Materialien und Verpackung

Durchschnittlicher Prozentsatz des recycelten Kunststoffgehaltes	15 %
Verpackung mit Recycling-Karton	Ja
Verpackung ohne Kunststoff	Nein
SCIP-Nummer	B2b22a56-41f2-497e-9ea6-cf093b3b8bd3
EU-RoHS-Richtlinie	Freistellungskonform
REACH-Verordnung	Produkt beinhaltet besorgniserregende Stoffe (SVHC) über dem Schwellwert



Energieeffizienz

CO2 Fußabdruck am Ende der Betriebsdauer	Energieeffizientes Produkt
--	----------------------------

Use Again



Reproduktion

Recyclingfähigkeitspotential in %	51
Circular Economy-Eignung	Entsorgungsinformationen
Austauschbare Batterie	Vom Benutzer austauschbar
Rücknahme	Ja
WEEE-Kennzeichnung	 Das Produkt muss entsprechend bestimmter Hinweise auf Märkten der Europäischen Union entsorgt werden und darf nicht in Haushaltsabfälle gelangen.

Image of product / Alternate images

Alternative






Product Environmental Profile

Smart-UPS ≤ 1500 VA

Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently.

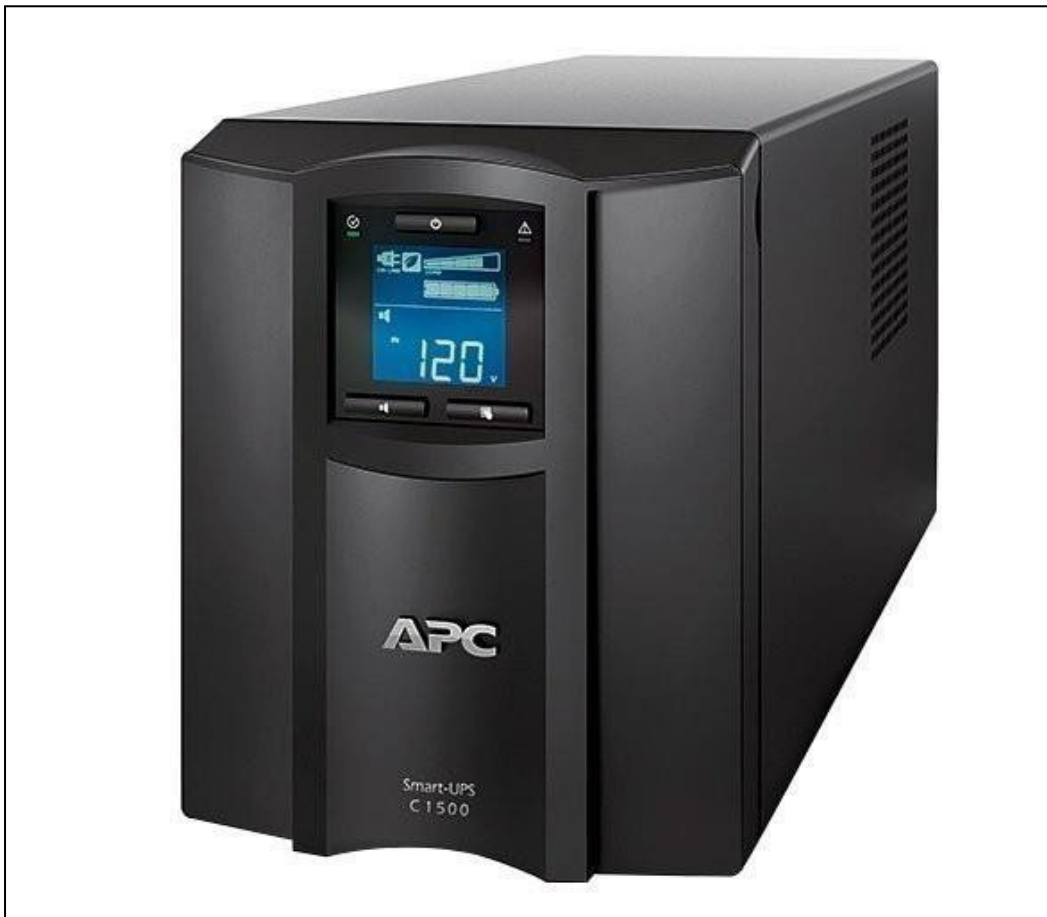




General information

Representative product	Smart-UPS ≤ 1500 VA -SMT1000I
Description of the product	Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently.
Description of the range	Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently. The environmental impacts of this referenced product are representative of the impacts of the other products of the range which are developed with a similar technology.
Functional unit	To protect the load of [800] Watts against input power failure during [5] years and provide a backup time of [6] minutes in case of a power outage

Constituent materials

Reference product mass	22137,99 g	including the product, its packaging and additional elements and accessories
------------------------	------------	--

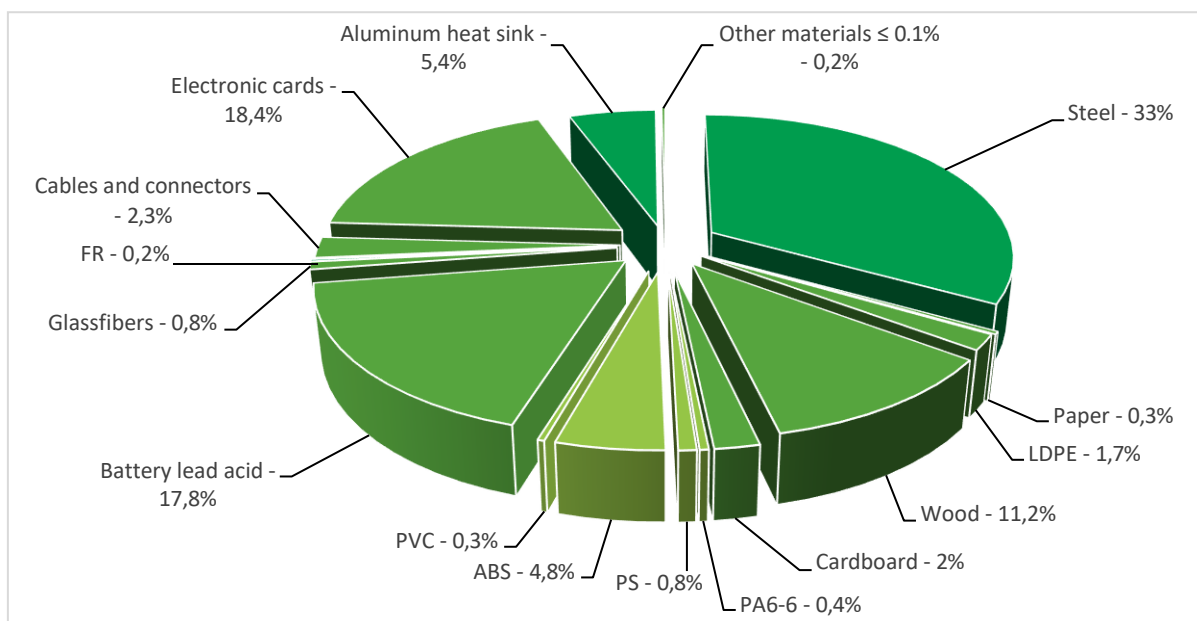

Substance assessment

Products of this range are designed in conformity with the requirements of the European RoHS Directive 2011/65/EU (RoHS2) and EU Delegated Directive (EU) 2015/863 and do not contain, or only contain in the authorized proportions, lead, mercury, cadmium, hexavalent chromium, flame retardants (polybrominated biphenyls - PBB, polybrominated diphenyl ethers - PBDE) or phthalates (Bis(2-ethylhexyl) phthalate - DEHP, Butyl benzyl phthalate - BBP, Dibutyl phthalate -DBP, Diisobutyl phthalate - DIBP as mentioned in the Directive

The battery pack(s) within this product range are designed to conform with the requirements of the Battery and Accumulator Directive (European Directive 2006/66/EC of 26 September 2006) and do not contain, or only contain in authorized proportions, the regulated substances lead (Pb), mercury (Hg) and cadmium (Cd) as mentioned in the Directive. Additionally, the non-spillable, valve regulated lead acid batteries used in the battery pack(s) within this product range are certified by their manufacturers as capable of withstanding the IATA/ICAO Vibration and Pressure Differential Test and that at a temperature of 55 degrees Centigrade, there is no free electrolyte to flow from a ruptured or cracked case.

Details of ROHS and REACH substances information are available on the Schneider-Electric Green Premium website

<http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page>



Additional environmental information

The Smart-UPS ≤ 1500 VA presents the following relevant environmental aspects

Design	Designed at a Schneider Electric Design Center that utilizes a design process that conforms to the requirements of the IEC 62430 "Environmentally Conscious Design for Electrical and Electronic Products" standard.
Manufacturing	Manufactured at a Schneider Electric production site ISO14001 certified
Distribution	Weight and volume of the packaging optimized, based on the European Union's packaging directive Packaging weight is 3400 g, consisting of cardboard (2.05%), PE film (1.72%) wood (11.25%) and paper (0.33%) Product distribution optimized by setting up local distribution centers
Installation	Smart-UPS ≤ 1500 VA does not require any special installation materials or operations.
Use	The product does not require special maintenance operations.
End of life	End of life optimized to decrease the amount of waste and allow recovery of the product components and materials This product contains Batteries lead acid (3940g), cables (478.31g), PCB (470g), ABS FR (50g) that should be separated from the stream of waste so as to optimize end-of-life treatment. The location of these components and other recommendations are given in the End-of-Life Instruction document which is available on the Schneider-Electric Green Premium website http://www2.schneider-electric.com/sites/corporate/en/products-services/green-premium/green-premium.page Recyclability potential: 51% Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).




Environmental impacts

Reference life time	5 years			
Product category	Active products			
Installation elements	Transport and disposal of packaging are accounted for during installation. No special installation components needed.			
Use scenario	Consumed power is 13,3 W 100 % of the time in Active mode, W 0 % of the time in Standby mode, W 0 % of the time in Sleep mode and W 0 % of the time in Off mode.			
Geographical representativeness	Europe			
Technological representativeness	Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently.			
Energy model used	Manufacturing	Installation	Use	End of life
	Energy model used: Philippines	ELCD_Electricity_mix_<1kV_EU-27__ELCD-0089	ELCD_Electricity_mix_<1kV_EU-27__ELCD-0089	ELCD_Electricity_mix_<1kV_EU-27__ELCD-0089

Compulsory indicators		Smart-UPS ≤ 1500 VA - SMT1000I					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to mineral resources depletion	kg Sb eq	3,11E-02	3,11E-02	0*	0*	1,57E-05	0*
Contribution to the soil and water acidification	kg SO ₂ eq	4,22E+00	1,57E+00	2,04E-02	5,42E-03	2,61E+00	1,15E-02
Contribution to water eutrophication	kg PO ₄ ³⁻ eq	3,22E-01	2,13E-01	5,38E-03	1,32E-03	9,79E-02	4,34E-03
Contribution to global warming	kg CO ₂ eq	6,85E+02	3,18E+02	7,60E+00	2,21E+00	3,45E+02	1,16E+01

Contribution to ozone layer depletion	kg CFC11 eq	1,29E-04	3,99E-05	4,73E-06	1,89E-07	8,39E-05	6,25E-07
Contribution to photochemical oxidation	kg C ₂ H ₄ eq	2,31E-01	1,05E-01	6,94E-04	4,18E-04	1,23E-01	1,16E-03
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Net use of freshwater	m3	4,01E+00	3,07E+00	8,10E-03	2,78E-02	9,01E-01	9,32E-03
Total Primary Energy	MJ	1,20E+04	4,79E+03	9,48E+01	9,27E+01	7,00E+03	5,99E+01

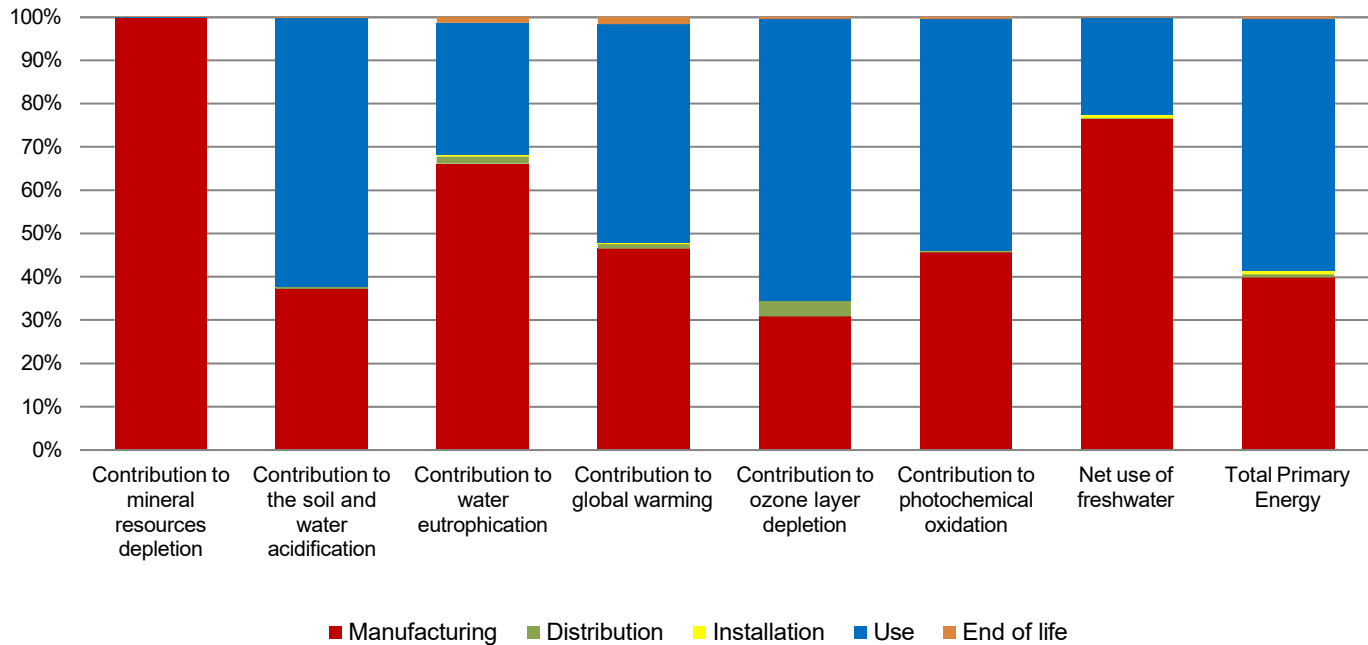

Optional indicators		Smart-UPS ≤ 1500 VA - SMT1000I					
Impact indicators	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Contribution to fossil resources depletion	MJ	7,70E+03	3,93E+03	9,65E+01	4,02E+01	3,56E+03	6,98E+01
Contribution to air pollution	m ³	6,23E+04	4,66E+04	2,72E+02	1,56E+02	1,48E+04	5,03E+02
Contribution to water pollution	m ³	5,26E+04	3,56E+04	1,13E+03	2,85E+02	1,45E+04	1,10E+03
Resources use	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Use of secondary material	kg	3,01E+00	3,00E+00	0*	2,92E-03	0*	0*
Total use of renewable primary energy resources	MJ	6,87E+02	1,34E+02	0*	5,20E+01	5,01E+02	0*
Total use of non-renewable primary energy resources	MJ	1,13E+04	4,65E+03	9,48E+01	4,07E+01	6,50E+03	5,98E+01
Use of renewable primary energy excluding renewable primary energy used as raw material	MJ	5,65E+02	6,91E+01	0*	0*	5,01E+02	0*
Use of renewable primary energy resources used as raw material	MJ	1,21E+02	6,48E+01	0*	5,66E+01	0*	0*
Use of non renewable primary energy excluding non renewable primary energy used as raw material	MJ	1,12E+04	4,51E+03	9,48E+01	2,28E+01	6,50E+03	5,98E+01
Use of non renewable primary energy resources used as raw material	MJ	1,61E+02	1,43E+02	0*	1,79E+01	0*	0*
Use of non renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Use of renewable secondary fuels	MJ	0,00E+00	0*	0*	0*	0*	0*
Waste categories	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life
Hazardous waste disposed	kg	8,85E+01	4,33E+01	0*	1,07E-01	0*	4,51E+01
Non hazardous waste disposed	kg	1,36E+03	5,65E+01	0*	1,19E+01	1,29E+03	7,54E-01
Radioactive waste disposed	kg	1,08E+00	2,60E-02	1,37E-03	6,59E-04	1,05E+00	3,84E-04
Other environmental information	Unit	Total	Manufacturing	Distribution	Installation	Use	End of Life

Materials for recycling	kg	1,24E+01	1,17E+00	0*	0*	0*	1,12E+01
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,48E+00	2,50E-02	0*	0*	0*	2,45E+00
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*
Components for reuse	kg	0,00E+00	0*	0*	0*	0*	0*
Materials for energy recovery	kg	2,48E+00	2,50E-02	0*	0*	0*	2,45E+00
Exported Energy	MJ	0,00E+00	0*	0*	0*	0*	0*

* represents less than 0.01% of the total life cycle of the reference flow

Life cycle assessment performed with EIME version EIME v5.5, database version 2016-11.

The use phase is the life cycle phase which has the greatest impact on the majority of environmental indicators (based on compulsory indicators).

According to this environmental analysis, proportionality rules may be used to evaluate the impacts of other products of this range.

The environmental indicators of other products in this family may be proportional extrapolated based on relationships between an amount of a key parameter of the product as compared to the amount of that key parameter within the reference product. Proportionality rules are based on the following key parameters: Manufacturing phase impacts - total mass of product. Distribution phase impacts - total mass of product (including packaging). Installation phase impacts - mass of packaging. Use phase impacts - life time energy use. End of Life impacts - the product mass (excluding packaging).

Please note that the values given above are only valid within the context specified and cannot be used directly to draw up the environmental assessment of an installation.

Verifier accreditation N°: VH08	Drafting rules	PCR-ed3-EN-2015 04 02
	Supplemented by	PSR-0010-ed1.1-EN-2015 10 16
Date of issue 01/2017	Validity period	5 years
Independent verification of the declaration and data, in compliance with ISO 14025: 2010		
Internal X External		
The PCR review was conducted by a panel of experts chaired by Philippe Osset (SOLINNEN)		
The elements of the present PEP cannot be compared with elements from another program.		
Document in compliance with ISO 14025: 2010 « Environmental labels and declarations. Type III environmental declarations »		

Schneider Electric Industries SAS

Customer Care Center

www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439

Capital social 896 313 776 €

Date: Monday, December 29, 2025

REACH Project

Dear Customer,

Schneider Electric SE and its affiliates (Schneider Electric) have undertaken since 2008 to comply strictly with the Reach regulation N° 1907/2006 for the declaration of Substances of Very High Concern (hereafter referred to as SVHC), authorization (Annex XIV) and restriction (Annex XVII).

As per our commitment under article 33 of the said regulation, you will find attached herebelow information, to the best of our knowledge and as of the date of publication of this information, regarding the presence of SVHC in Schneider Electric products.

This information will evolve over time in function of the improved knowledge resulting from both additional information provided by our suppliers and our own investigations.

Moreover, Schneider Electric has taken into account the judgement of the EU Court of Justice of 10 September 2015 in case [C-106/14](#) in the declarations at part level.

In accordance with its environmental strategy, Schneider Electric and its affiliates have decided to apply REACH regulation on a worldwide basis.

In accordance with the Environment policy of our Company, we continuously work towards products and services which reduce the impact to the environment or on human health when used for their intended purpose and in conditions stated in the documentation provided by Schneider Electric. With this objective, Schneider Electric willingness is to substitute as soon as possible substances of concern with a specific focus on REACH Annex XIV replacement before their sunset date.

At life end, we invite you to follow appropriate waste and recycling procedures. In case the product is inside the legal scope of RoHS, please note that this document is not the CE declaration. To access to the CE declaration, please refer to the [Customer Care Centers](#)

Best Regards,

Vanessa MILER-FELS
VP Environment



Global Safety, Environment & Real Estate Senior Vice President
Schneider Electric Industries SAS

Schneider Electric Industries SAS
Postal address / Adresse postale :
Le Hive
35 rue Joseph Monier - CS 30323
F-92506 Rueil Malmaison Cedex
Phone: +33 (0)4 76 57 60 60
<http://www.schneider-electric.com>

Legal information / Mentions légales :
Société par actions simplifiée au capital de 896,313,776 euros
954 503 439 rcs Nanterre - code APE : 2712Z
Siret : 954 503 439 01719
n°ident. TVA : FR 04 954 503 439
Siège Social ! 35, rue Joseph Monier
F - 92500 Rueil-Malmaison

Unless otherwise stated in the table, the data shown in this spreadsheet are related to the following production Date Code: 53/2025 (Week / Year)

Unless otherwise stated in the table, the data shown in this spreadsheet are related to the following version of the REACh regulation:
December 2025 candidate list

Commercial ref. :	SMX1500RMI2UNC
Range :	Smart-UPS
Brand :	APC
Product description :	APC Smart-UPS X 1500VA Rack/Tower LCD 230V with Network Card
SCIP ID :	b2b22a56-41f2-497e-9ea6-cf093b3b8bd3

In this product, no substance under REACH annex XVII regulation is used in the scope of restriction. This includes for instance asbestos, polycyclic-aromatic hydrocarbons (PAH)...

According to REACH Regulation EC 1907/2006 article 33 duties and the judgment of the EU court of Justice of 10 September 2015 in case C-106/14, the following SVHC are present in this product above 0,1% threshold at part level.

Our products are safe from a chemical exposure perspective, under normal conditions of use. If any specific Safe conditions of use, you will find more details in the table.

For specific End of Life recommendations, please look at Product End of Life instructions according to WEEE document.

Part	SVHC content	CAS number	EC number	Specific Safe conditions of use
This product includes a battery(ies) that contain(s) the following substance(s) above the threshold at part level.	Lead	7439-92-1	-	This product is safe from chemical exposure perspective, under normal conditions of use. Nevertheless, do not open this battery in order to avoid direct contact with this substance. For specific EoLi recommendations, please look at Product EoLi document.
This product includes metallic part(s) that contain(s) the following substance(s) above the threshold at part level.	Lead	7439-92-1	-	None
In this product, the PCBA includes electronic components that contain the following substance(s) above the threshold at component level.	Lead	7439-92-1	-	None

Date: Monday, December 29, 2025

Object: Schneider Electric RoHS declaration (RoHS: Restriction of Hazardous Substances)

Dear Customer,

Effective July 1st, 2006, the European Directive 2002/95/EC -"Restriction of Hazardous Substances" (RoHS), its recast 2011/65/EU of June 8th, 2011, the Delegated Directive (EU) 2015/863 of March 31st 2015, restricts the use in Europe in certain electrical and/or electronic equipments of lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), polybrominated diphenyl ethers (PBDE) flame retardant, and from July 22nd 2019, Bis(2-ethylhexyl) phthalate (DEHP), Butyl benzyl phthalate (BBP), Dibutyl phthalate (DBP), Diisobutyl phthalate (DIBP).

Schneider Electric decided to make RoHS compliance of its products one of its priorities, even if they do not fall in RoHS scope, and most of Schneider Electric products are RoHS compliant. This stance is fully in line with Schneider Electric environmental policy and EN IEC 63000:2018 standard.

The information below provides the current product status according to regulation in force at the date of publication of this present document. Any future changes, either in product design or in the Directive may change the status reported here. In case the product is inside the legal scope of RoHS, please note that this document is not the CE declaration. To access to the CE declaration, please refer to the [Schneider Electric download center](#). In the context of the sustainable development policy of our Company we continuously work towards products and services which reduce the impact on environment or human health when used for their intended purpose and in conditions stated in the documentation provided by Schneider Electric.

In the following declaration, a "Pro-active compliance" wording means that the product is not an EEE or not in the legal scope of the regulation, but is in line with the substances restrictions and corresponding exemptions.

Shall you need any further information or have specific questions (eg. related to phased out products), our [Customer Care Centers](#) will support you. Please Note: You can find more information about Schneider Electric environmental commitment on [Environmental Data Program webpage](#)

Best Regards,

Vanessa MILER-FELS
VP Environment



Global Safety, Environment & Real Estate Senior Vice President
Schneider Electric Industries SAS

Schneider Electric Industries SAS
Postal address / Adresse postale :
Le Hive
35 rue Joseph Monier - CS 30323
F-92506 Rueil Malmaison Cedex
Phone: +33 (0)4 76 57 60 60
<http://www.schneider-electric.com>


Legal information / Mentions légales :
Société par actions simplifiée au capital de 896,313,776 euros
954 503 439 rcs Nanterre - code APE : 2712Z
Siret : 954 503 439 01719
n°ident. TVA : FR 04 954 503 439
Siège Social ! 35, rue Joseph Monier
F - 92500 Rueil-Malmaison

Commercial ref.	Range	Compliance status
Brand	Product description	
SMX1500RMI2UNC APC	Smart-UPS APC Smart-UPS X 1500VA Rack/Tower LCD 230V with Network Card	RoHS (10 substances) : Pro-active compliance with exemptions 6(c), 7(c)-I (directive evolution applicable from July 22nd 2021)

Product End of Life Instructions

Smart-UPS ≤ 1500 VA

Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently.






Potential disassembly risks



End of Life Instructions

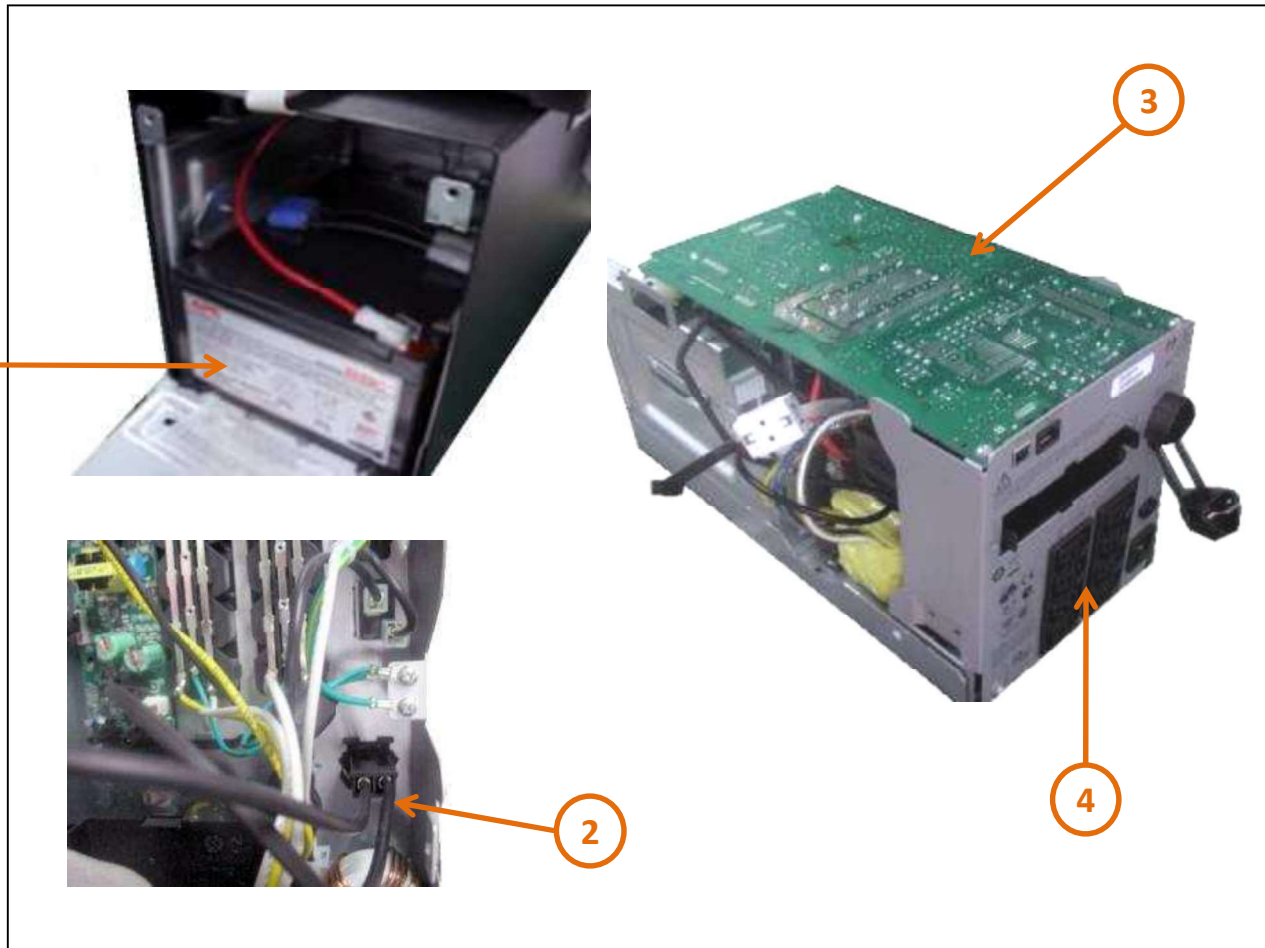

Recommendation	Number on drawing	Component / Material	Weight (in g)	Comment
To be depolluted		Sealed Lead Acid Batteries	3940	See: RBC, Battery Module, Extended Run Time Battery Module for End of Life Instructions of battery pack. See: Material Safety Data Sheet Available at www.apc.com Use authorized battery recycler. Caution: Batteries may contain and electrical charge- avoid creating short across terminals. Caution: Cracked or bloated batteries may be hazardous and represent a lead (Pb) exposure.
To be depolluted		External Power Cables	478	Power cables with the unit.
To be depolluted		Printed Circuit Boards (PCBA)	470	Mass is for PCBAs >10cm2 in surface area.

To be dismantled

Outlet Assemblies

50

Mass is for ABS-PC parts with brominated flame retardant.



Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	APC
Product function	Smart-UPS ≤ 1500 VA Uninterruptible Power Supply (UPS) products protect equipment and critical data from interruptions by supplying reliable, network-grade back up power reliably and efficiently.
Product reference	SMT1000I
Additional similar product references	Smart-UPS: DLA(XXXX)(Y), DLT(XXXX)(Y), FJX(XXXX)(Y), HTX(XXXX)(Y), NMX(XXXX)(Y), SMT(XXXX)(Y), SMX(XXXX)(Y), SMV(XXXX)(Y), SUA(XXXX)(Y), where XXXX is a number between 500 and 2000, and Y is blank or any combination of letters and numbers.
Total representative product mass	18738
Representative product dimensions	219mm x 171mm x 439mm
Accessories	None
Date of information release	01/2017



Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
In case of special transportation: transportation method	The battery pack used in this product range contains lead acid batteries that are regulated as Dangerous Goods shipping must be performed in accordance with the appropriate transportation regulations.	
Recyclability potential	51%	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS

Customer Care Center

www.schneider-electric.com/contact

35, rue Joseph Monier

CS 30323

F- 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €

www.schneider-electric.com

ENVEOLI1612028_V1

Published by Schneider Electric

© 2016 - Schneider Electric – All rights reserved

01/2017