


Panasonic

Cell Type BK-4HCDE

To PECE

Specifications

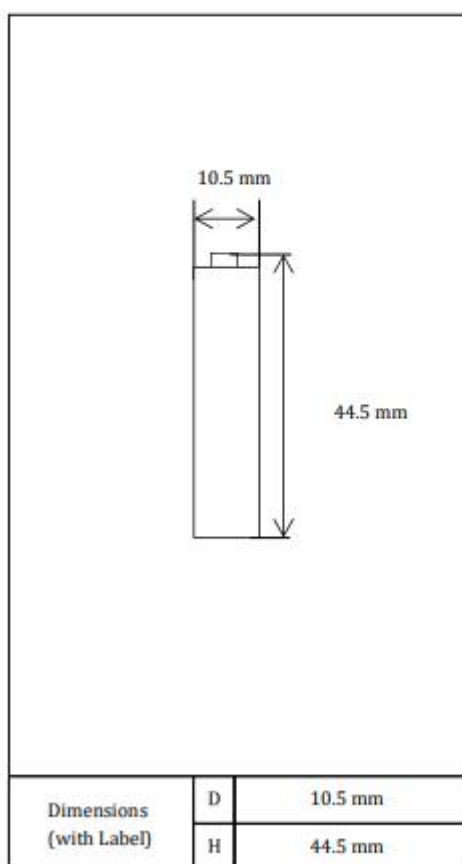


Type : Nickel-Metal Hydride Battery			Size : AAA Consumer Type
Country of origin			Japan
Capacity ¹⁾	Minimum		930mAh
Nominal Voltage			1.2V
Charging Current x Time		Fast Charge ²⁾	Max.480mA
Ambient Temp.	Charge Condition	Fast Charge ²⁾	0°C - 40°C
	Discharge Condition		0°C - 50°C
	Storage Condition	Less than 90days	-20°C - 40°C
		Less than 1year	-20°C - 30°C
Internal Impedance ³⁾ (after discharge to E.V.=1.0V)			Approx. 45m Ω (at 1000Hz)
Weight ⁴⁾			Approx. 13 g
Size ⁴⁾ :(Diameter) x (Height)			10.5(D) x 44.5(H) mm

- 1) Single cell capacity under the following condition.
Charge: 93 mA x 16h, Discharge: 186 mA (E.V = 1.0V at 20deg. C)
- 2) Use recommended of charging system
- 3) After a few charge and discharge cycles under the above first condition.
- 4) With label



Charge Characteristics

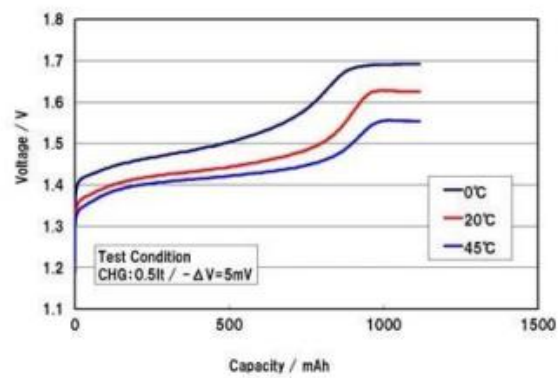

Discharge Characteristics

