

AA size

eneloop
Ready to use Rechargeable Battery TM



Specifications

Model			BK-3MCDE
Type			AA size consumer type
Country origin			Japan
Capacity (minimum) ¹⁾			2000 mAh
Nominal Voltage			1.2V
Charging Current		Fast Charge ²⁾	Max. 2000 mA
Ambient Temp.	Charge		0℃ - 40℃
	Discharge		-20℃ - 50℃
	Storage	Less than 90 days	-20℃ - 40℃
		Less than 1 year	-20℃ - 30℃
Internal impedance (after discharge to E.V.=1.0V) ³⁾			Approx. 25mΩ (at 1000Hz)

1) Single cell capacity under the following condition.


Charge : 200mA×16h, Discharge : 400mA(E.V.=1.0V) at 25°C

2) Use recommended charging system. 3) After a few charge and discharge cycles under the above 1) condition.

Cell size, weight with tube

Dimensions	D	14.35mm
	H	50.4mm
Weight	Approx. 28g	


14.35mm

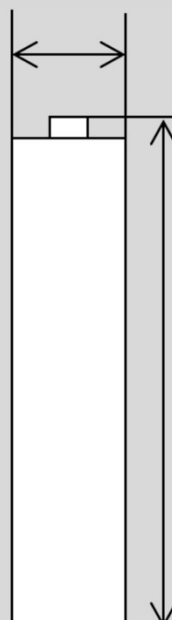

50.4mm

Typical Characteristics

Charge

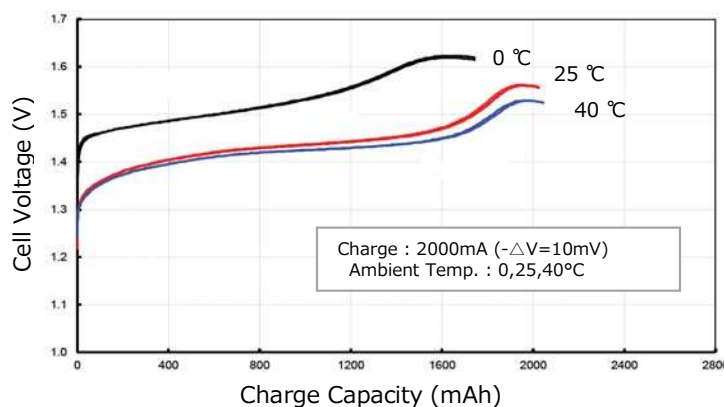

Discharge

