

Easy switching to utility power during UPS maintenance

Designed for Uninterruptible Power Supply (UPS), the Maintenance Bypass PDU (MBP) Series allows utility power to bypass the UPS, so that users can perform quick and safe maintenance without having to shut down power system and connected equipment. The MBPs support flexible installation to meet different space requirement.

SERIES FEATURES


- >1U Rackmount
- LED Status Indicator
- Metal Housing
- Retaining Clip Design

- Multiple Mounting Options
- Rack Ears Included
- Cascading Design

PRODUCT CALLOUTS

- 1. AC Output Outlets
- 2. Output Circuit Breaker
- 3. "Normal" LED Indicator
- 4. "Bypass" LED Indicator

- 5. Manual Bypass Switch
- 6. "To UPS Output" Inlet
- 7. "To UPS Input" Outlet
- 8. "Utility Power" Inlet

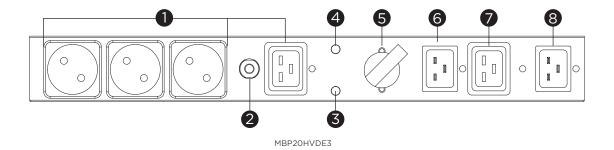

Model Name	MBP20HVDE3
General	
Compatible Models	OL1000ERTXL2U, OL1500ERTXL2U, OL2000ERTXL2U, OL2200ERTXL2U, OL3000ERTXL2U
nput	
nput Voltage Range (Vac)	200 - 240
Rated Input Current (A)	16
Jtility Power	IEC C20
JPS Power Input	IEC C19
JPS Outlet	IEC C20
Dutput	
Outlet Type	IEC C19 x 1, Schuko x 3
Typical Transfer Time (ms)	<4
Cascading	Yes, IEC 16A Output Socket
Management Management	
_ED Indicators	Normal Status (Green Color), Bypass Status (Red Color)
Physical	
Form Factor	>1U Rackmount
Enclosure Construction	Metal
Color	Black
nstallation	Vertical Rackmount, Horizontal Rackmount
nstallation Attached to Rack/Tower UPS	s Yes
Physical Size	
Dimensions (WxHxD) (mm.)	433 x 51 x 76
Weight (kg.)	1.3
Shipping Dimensions	
Dimensions (WxHxD) (mm.)	245 x 66 x 500
Weight (kg.)	3.5
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity	
(Non-condensing) (%)	0-90 "
Operating Elevation (feet/meters)	0-9,843 feet (0-3,000 meters)
Storage Temperature (°C)	-15 - 45
Certifications	
Certifications*	CE CE
RoHS	Yes
Certifications may vary according to differer	t regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change with	out notice.