

Be Your Window To The World


Der PRO MP275QPDG ist ein 27-Zoll 16:9 WQHD 100Hz Docking-Monitor mit Daisy Chain Unterstützung und einem USB Typ C Dock mit 98W Stromversorgung, RJ45 Ethernet und Display signal über ein einziges Kabel. Dieser Monitor wurde für professionelle Anwender entwickelt, die die ultimative Lösung zur Produktivitätssteigerung suchen.



Picture and logos

SELLING POINTS

- Docking-Monitor bietet die meisten Funktionen durch den Anschluss eines einzigen Type-C-Kabels.
- Type-C 98W Stromversorgung und Display- & KVM-Umschalter
- Daisy-Chain mit DisplayPort Multi-Stream Transport
- Eingebaute FHD-Webcam mit digitalem Mikrofon
- Eingebautes 1Gbps-RJ45-Ethernet für stabile kabelgebundene Verbindung
- TÜV-zertifiziertes Display gewährleistet Schutz und Gesundheit der Augen.
- MSI EyesErgo-Technologie mit Anti-Flicker-Technologie hilft, Augenbelastung und Ermüdung zu vermeiden.
- 100 Hz Bildwiederholrate sorgt für ein besseres Seherlebnis mit flimmerfreiem Bild.
- MSI Eye-Q Check hilft, die Augen selbst zu überprüfen und erinnert daran, bei längerer Nutzung des Monitors Pausen einzulegen.
- Ein verstellbarer Standfuß mit mini-PC-montierbarem Design sorgt für eine bessere Ergonomie und eine aufgeräumte Einrichtung, was den Benutzerkomfort und die Organisation verbessert.
- Standard VESA-montierbar & Design mit Zubehörsteckplatz.
- Zwei eingebaute Lautsprecher.

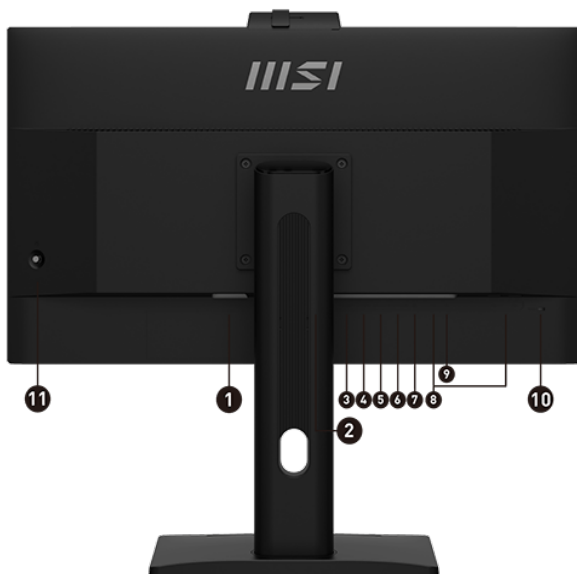

1. Stromanschluss
2. 2x HDMI™ 2.0b (WQHD@100Hz)
3. 1x DisplayPort 1.2a Input
4. 1x Typ-C (DP Alt.) mit 98W PD
5. 1x DisplayPort 1.2a Output
6. 1x USB 5Gbps Typ-B
7. 1x LAN Port
8. 4x USB 5Gbps Typ-A
9. Kopfhörerausgang
10. 1x Kensington Lock
11. 5-Wege Navigation

SPECIFICATION

Model	SKU Number	9S6-3PC8CM-002
	Entity MKT Name	PRO MP275QPDGDE
	Part No	9S6-3PC8CM-002
	Color	ID1/Black-Black
Display	Screen Size	27" (68.58 cm)
	Active Display Area (mm)	596.736(H) x 335.664(V)
	Curvature	Flat
	Panel Type	IPS
	Resolution	2560x1440 (WQHD)
	Pixel pitch (mm)	0.2331(H)x0.2331(V)
	Aspect Ratio	16:9
	Dynamic Refresh Rate technology	Adaptive-Sync
	Dynamic Refresh Rate Activated Range	48~100Hz
	HDR (High dynamic range)	HDR Ready
	SDR Brightness (nits)	250
	Contrast Ratio	1300:1
	DCR (Dynamic Contrast Ratio)	100000000:1
	Signal Frequency	71.04~186.3 KHz(H) / 48~100 Hz(V)
	Refresh Rate	100HZ
	Response Time (MPRT)	1ms(MPRT)
	Response Time (GTG)	4ms
	View Angles	178°(H)/178°(V)
	NTSC (CIE1976 area percentage/overlap)	87%/81%
	NTSC (CIE1931 area percentage/overlap)	74%/72%
	sRGB (CIE1976 area percentage/overlap)	100%/95%
	sRGB (CIE1931 area percentage/overlap)	105%/95%
	Adobe RGB (CIE1976 area percentage/overlap)	85%/84%
	Adobe RGB (CIE1931 area percentage/overlap)	77%/75%
	DCI-P3 (CIE1976 area percentage/overlap)	79%/79%
	DCI-P3 (CIE1931 area percentage/overlap)	77%/77%
	Rec.709 (CIE1976 area percentage/overlap)	100%/95%
	Rec.709 (CIE1931 area percentage/overlap)	105%/95%
	Rec.2020 (CIE1976 area percentage/overlap)	58%/58%
	Rec.2020 (CIE1931 area percentage/overlap)	55%/55%
	Surface Treatment	Anti-glare
	Display Colors	1.07B
	Color bit	10 bits (8 bits + FRC)
Schnittstellen	USB Type C (DisplayPort Alternate)	1
	Headphone-out	1
	USB 3.2 Gen 1 Type A	4
	USB 3.2 Gen 1 Type B	1
	Lock type	Kensington Lock
	Speaker	2Wx 2
	HDMI	2
	HDMI version	2.0b
	HDMI HDCP version	2.3
	DisplayPort	1
	DisplayPort version	1.2a
	DisplayPort HDCP version	2.3
	Warranty	24M
	Garantie	
Power	Power Type	Internal Power Board
	Power Input	100~240V, 50/60Hz
	On-mode Power Consumption (KWh/1000h)	26
	Annual Energy Consumption (KWh)	38
	Standby-mode Power Consumption (W)	0.5
	Off-mode Power Consumption (W)	0.3
	Energy Efficiency Rating	F
	Power Cord Type	C13



PRO MP275QPDGDE

PRO MP275QPDGDE

Zubehör	DisplayPort Cable	0
	HDMI Cable	1
	DVI Cable	0
	USB Type A to Type B Cable	1
	USB Type C to Type A Cable	0
	USB Type C to Type C Cable	1
	Thunderbolt Cable	0
	VGA Cable	0
	3.5mm audio Cable	0
	3.5mm combo audio Cable	0
	3.5mm Mic Cable	0
	Power Cord	1
	AC Adaptor	0
	Quick Guide	1
	Warranty Card	0
	Mouse Bungee Unit	0
Design	Adjustment (Tilt)	-5° ~ 20°
	Adjustment (Swivel)	-45° ~ 45°
	Adjustment (Height)	0 ~ 130 mm
	Adjustment (Pivot)	-90° ~ 90°
	VESA Mounting	100x100mm
Abmessungen & Gewicht (Product)	Product Dimension with Stand (WxDxH) (mm)	614.0 x 233.9 x 578.9
	Product Dimension without Stand (WxDxH) (mm)	614.0 x 53.6 x 377.4
	Stand Dimension (WxDxH) (mm)	300.0 x 233.9 x 422.6
	Weight (Net kg)	7.05
	Weight Without Stand (kg)	4.38
Abmessungen & Gewicht (Verpackung)	Inside Carton Dimension (WxDxH) (cm)	83.1 x 13.3 x 46.8
	Outer Carton Dimension (WxDxH) (cm)	85 x 15 x 50
	Weight (Gross kg)	10.24
Barcode Info	EAN	4711377238199