




EMTEC

Mobility

HUB Type-C T650C


USB Type-C 6-in-1 HUB



SHARE & STREAM PARTAGER & DIFFUSER

Easily share, stream and manage your files wherever you are!

- High speed transfer
- Up to 6 devices can connect at the same time
- 3x USB-A 3.0 (3.1 gen1) ports
- 1x USB-C port with Power Delivery up to 100W
- SD card reader (UHS-I)
- 4K HDMI port
- Premium finishing with retro-lighted logo
- EMI protection prevents interference with wireless devices

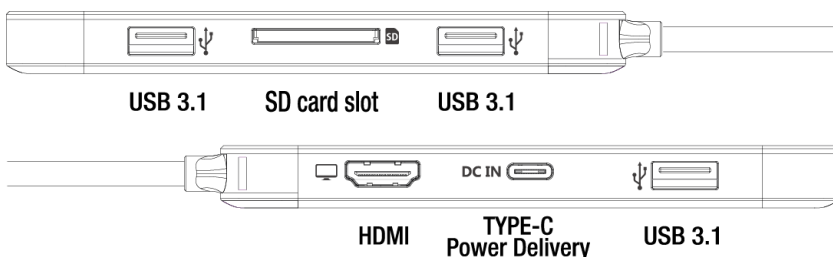

Manage all of your files

- Easily manage your files from your smartphone, tablet or computer*
- Connect up to 6 devices at once
- Copy files between multiple devices




Stream games, movies & photos

- Stream your device's screen in Ultra High Definition 4K or Full HD 1080p video to HDTV, monitors, or projectors (needs a compatible host port*).
- You can watch a movie, stream Netflix or your games and view your photos on a bigger external screen or TV.



Share with family and friends

- Easily copy and paste your files from your computer to your mobile devices any way you want.
- Use the card reader to quickly backup your pictures and videos.

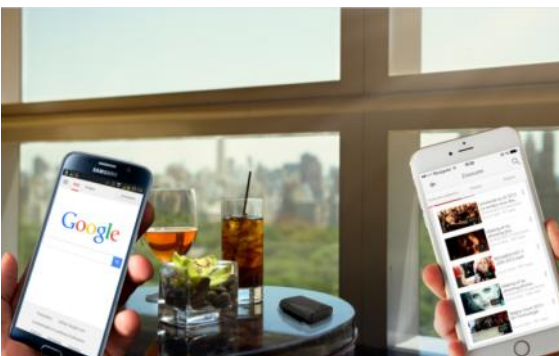

Power up your device

- Power up your Type-C computer through the power delivery port (needs a compatible Type-C host port). Up to 100W !

* Important remark:

To be able to stream to the HDMI port, the host device's Type-C port must be compatible with DP (Display Port) standard. For example devices like MacBooks, newer ultrabooks, smartphones like Samsung S8/S9 or Huawei Mate Pro 10 (non exhaustive list) are compatible with the standard, but some older devices might not be able to use the function.

Product specifications

Over All	When connect to Type C computer, it converts computer's Type-C interface to multi-interfaces, including USB3.0 A*3, HDMI*1, SD*1.
USB device interface	USB 3.0 (3.1gen1), USB 2.0, USB 1.1
Upstream Interface	Charging (Power Delivery—PD) Compliant to USB Power Delivery Specification Revision2.0 Support 5V/9V/12V/15V/20V , Max charge power 100W Supports DisplayPort™ 1, 2lanes Compliant with DisplayPort specification1.2a. Notice: If the Type-C interface of PC does not support DP output, there is no video function when connecting to product. Current: Max 20V-5A 100W
Downstream Interface	USB-A x3, these 3 interfaces can work at the same time. Current: Disconnect adapter: 3 interfaces (include SD), total current 5V-1.35A . Connect adapter: when the adapter is less than 30W, the current is 5V-1.5A, when the adapter is more than 30W, the current is 5V-1.8A. Support HDMI up to 1080p at 60Hz or UHD 3840x2160 at 30Hz. Support Secure Digital™ v1.0/ v1.1/ v2.0/ SDHC/ SDXC (Capacity up to 2TB). Support Secure Digital™ v3.01 UHS-I (Ultra High Speed): SDR12/ SDR25/ SDR50/ DDR50/ SDR104 Type-C Port: Compliant to USB Power Delivery Specification Revision3.0, (Support 5V/9V/12V/15V/20V , Max charge power 100W)
Devices & System Compatibility	All computer which meets USB3.1 GEN1/USB3.1 GEN2 (The type C of computer support PD/DP at the same time) Phone with Type C full functional output(support PD/DP/USB3.1 at the same time) . Huawei Mate10 series, Samsung S8 series and HTC U. When connecting with mobile phone, the load power of usb depends on the output power that phones support. When using the original adapter of phone, it may not support using hub and charging phone simultaneously. It need to make sure that the adapter should be meet 5V/3A when connection. Compatible with Windows 7, 8, 8.1, 10 (32/64bit) / Android 7.0 and above. Mac OS 10.6 and above.
Box content	Hub, Quick Start guide

Logistics

Reference	Description	EAN Unit	EAN Carton 5 pces	EAN Carton 40 pces
ECHUBT650C	Emtec HUB 6-in-1 Type-C T650C	3 126 170 164 193	3 126 170 164 209	3 126 170 164 216

Product				Packaging			
Height	Width	Depth	Weight	Height	Width	Depth	Weight
120mm	42mm	12mm	65gr	196mm	108mm	20mm	115gr
5 pces inner carton				40 pces outer carton			
Height	Width	Depth	Weight	Height	Width	Depth	Weight
198mm	110mm	110mm	700g	460mm	233mm	218mm	7kg