







PR750ELCD3C/PR1000ELCD3C



PROFESSIONAL UPS TO SAFEGUARD IT EQUIPMENT



The professional UPS with Automatic Voltage Regulation to stabilize the AC power output for business applications


Designed for computer room and server room applications, the Professional Sinewave Tower Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output with Pure Sine Wave to ensure high power quality. The products are also compatible with power management software to easily control and monitor the UPS system.

SERIES FEATURES

- Line-interactive UPS Topology
- Energy Saving Technology
- Active PFC Compatible
- Pure Sine Wave Output
- Automatic Voltage Regulation (AVR)
- Overload Protection
- Critical/Non-critical Load Outlets
- Hot-swappable Batteries
- Surge and Spike Protection
- EMI and RFI Filtration
- LCD Status Display
- Emergency Power Off (EPO) Port
- PowerPanel Management Software
- SNMP/HTTP Remote Management Capability (Optional)
- Built-in Remote Cloud Card by Ethernet
- Tower Form Factor

PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. LCD Display Panel
4. Function Button(s)
5. Battery Backup & Surge Protected Outlets
6. Cloud Monitoring (Ethernet Port)
7. EPO Port
8. Serial Port
9. USB Port
10. TVSS Screw
11. SNMP/HTTP Network Slot
12. Input Circuit Breaker
13. AC Inlet

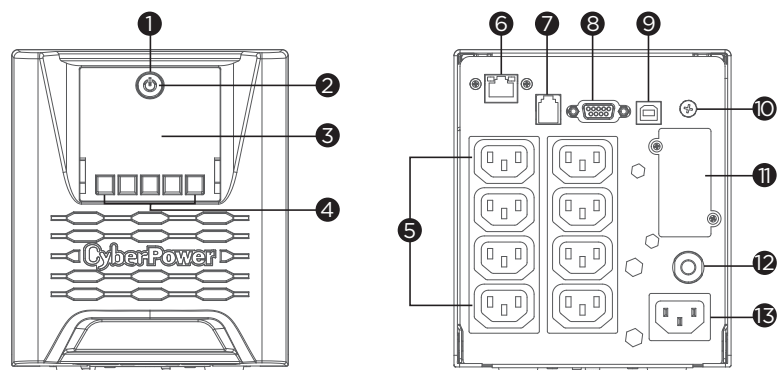

PR750-1000ELCD3C



TECHNICAL SPECIFICATIONS

Model Name	PR750ELCD3C		PR1000ELCD3C
General			
UPS Topology	Line-interactive		
Energy Saving Technology	GreenPower UPS™ Bypass Technology		
Active PFC Compatibility	Yes		
Input			
Nominal Input Voltage (Vac)	200, 208, 220, 230, 240		
Input Voltage Range (Vac)	160 - 286		
Adjustable Voltage Range (Vac)	151 - 302		
Input Frequency (Hz)	50 ± 3, 60 ± 3		
Input Frequency Detection	Auto-sensing		
Rated Input Current (A)	10		
Input Connector Type	IEC C14		
Output			
Capacity (VA)	750	1000	
Capacity (Watts)	750	1000	
On Battery Waveform	Pure Sine Wave		
On Battery Voltage(s) (Vac)	200 ± 5%, 208 ± 5%, 220 ± 5%, 230 ± 5%, 240 ± 5%		
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%		
Power Factor	1		
Automatic Voltage Regulation (AVR)	Double Boost, Single Buck		
Overload Protection	Internal Current Limiting, Circuit Breaker		
Outlet(s) - Total	8		
Outlet Type	IEC C13 x 8		
Outlet(s) - Battery & Surge Protected	8		
Outlet(s) - Critical Load (CL)	4		
Outlet(s) - Non-critical Load (NCL)	4		
Typical Transfer Time (ms)	3 (Max 4ms at high sensitivity), 5 (Max 8ms at normal sensitivity)		
Battery			
Runtime at Half Load (min)	13.8	9.7	
Runtime at Full Load (min)	4	3	
User-replaceable	Yes		
Hot-swappable	Yes		
Battery Type	Sealed Lead-acid		
Replacement Battery Pack (RBP)	RBP0203	RBP0204	
Replacement Battery Pack (RBP) Quantity (pcs)	1		
Surge Protection & Filtering			
Surge Suppression (Joules)	410		
EMI/RFI Filtration	Yes		
Management & Communications			
LCD Panel	Yes		
HID Compliant USB Port(s)	1		
Serial Port	RS232		
Emergency Power Off (EPO) Port	Yes		
Power Management Software	PowerPanel Business (Recommended)		
SNMP/HTTP Remote Monitoring	Yes - with optional RMCARD205		
Remote Cloud Card	Yes - Built-in Remote Cloud Card by Ethernet		
Physical			
Form Factor	Tower		
Physical Size - UPS Module			
Dimensions (WxHxD) (mm.)	138 x 162 x 360		
Weight (kg.)	12.12	12.52	
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 95		
Online Thermal Dissipation (BTU/hr)	23.94	17.1	
Audible Noise at 1.0M from Surface of Unit (dBA)	-	38.5-45.2	
Fanless Design	Yes - virtually no noise	-	
Certifications			
Certifications*	CE		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.